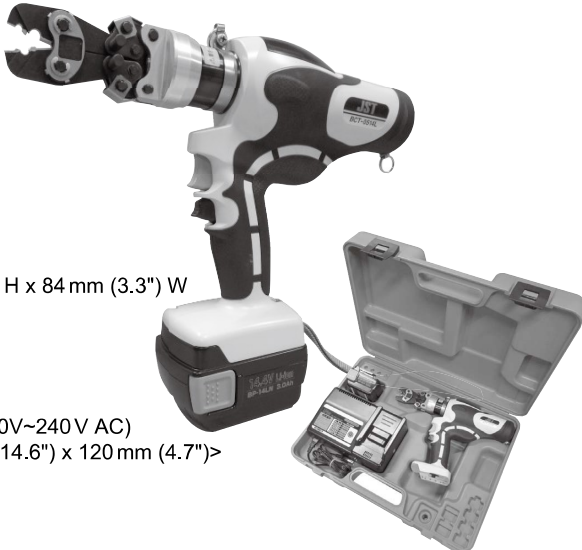
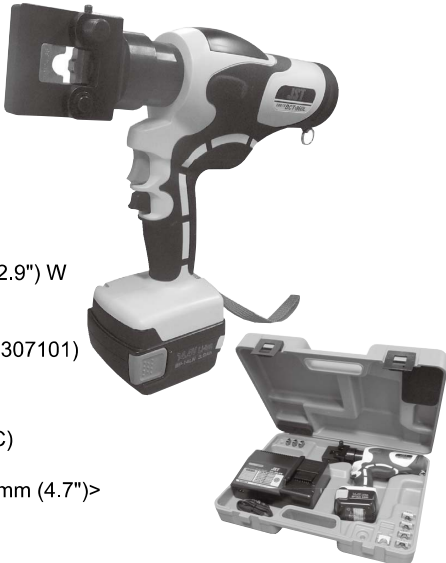


Hydraulic Tools (BCT, YPT)

Applicable terminals/ splices Nominal size	Battery operated type
0.5 to 14 terminals/splices	 Tool Model No.: BCT-0514L Dimensions: 273 mm (10.7") L x 285 mm (11.2") H x 84 mm (3.3") W Weight: Approx. 1.9 kg (4.1 lbs.) Max. pressure output: 15 kN (1.5 tonf) Standard accessories Battery pack: BP-14LN/1pcs. Battery charger: CH-25LNW/1 set (Input voltage 100V~240V AC) Double blow case: 1 pcs. <500 mm (19.7") x 370 mm (14.6") x 120 mm (4.7")> Optional: Dies Shoulder belt
8 to 60 terminals/splices	 Tool Model No.: BCT-860L Dimensions: 305 mm (12.0") L x 285 mm (11.2") H x 73 mm (2.9") W Weight: Approx. 2.7 kg (6.0 lbs.) Max. pressure output: 69 kN (7 tonf) Remarks: Conforms to JIS C9711 ㉔ (Certificate No. JQ 0307101) Standard accessories Battery pack: BP-14LN/1pcs. Battery charger: CH-25LNW/1 set (Input voltage 100V~240V AC) Dies: 1 set for the terminals of nominal size 8 to 60 Carrying case: 1 pcs. <500 mm (19.7") x 370 mm (14.6") x 120 mm (4.7")> Optional: Shoulder belt
8 to 150 terminals/splices	 Tool Model No.: BCT-8150L Dimensions: 370 mm (14.6") L x 319 mm (12.5") H x 84 mm (3.3") W Weight: Approx. 6.6 kg (14.6 lbs.) Max. pressure output: 186 kN (19 tonf) Remarks: Conforms to JIS C9711 ㉔ (Certificate No. JQ 0307101) Standard accessories Battery pack: BP-14LN/1pcs. Battery charger: CH-25LNW/1 set (Input voltage 100V~240V AC) Dies: 1 set for the terminals of nominal size 8 to 150 Carrying case: 1 pcs. <630 mm (24.8") x 485 mm (19.1") x 160 mm (6.3")> Optional: Shoulder belt